

Environmental Product Declaration



In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Lagur® Home

from

Lagur A/S



Programme:	The International EPD® System, www.environdec.com
Programme operator:	EPD International AB
EPD registration number:	EPD-IES-0017439
Publication date:	2025-01-14
Valid until:	2030-01-13
Type of EPD:	EPD based on declared unit

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR)
CEN standard EN 15804+A2 serves as the Core Product Category Rules (PCR) reference packaging based on EF 3.1.
<i>Product Category Rules (PCR): Construction products 2019:14 Version 1.3.4 ,2024-04-30; EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems.</i>
PCR review was conducted by: <i>Martin Erlandsson, IVL Swedish Environmental Research Institute, martin.erlandsson@ivl.se</i>
Life Cycle Assessment (LCA)
LCA accountability: <i>Jacob Andreasen, Augustas Sudaras, Green Survey ApS</i> www.greensurvey.dk
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: <input checked="" type="checkbox"/> EPD verification by individual verifier Third-party verifier: <i>Sigita Židonienė, PhD., Vesta Consulting, Sigita@vestaconsulting.lt</i> Approved by: The International EPD® System
OR
Procedure for follow-up of data during EPD validity involves third party verifier: <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804+A2, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have

equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804+A2 and ISO 14025.

Company information

Owner of the EPD: Lagur A/S

Email: kundeservice@lagur.dk

Phone: +45 70605600

Description of the organisation: The story of LAGUR begins with the Danish engineer and inventor Olav René Nielsen, who developed a new type of water treatment that could eliminate limescale issues without removing the limescale from the water.

LAGUR was founded in 2014 by Olav René Nielsen, Claus Kjær Jensen, and Simon Sørensen, after the three founders had spent four years testing the new water treatment system in various contexts where large amounts of water were used.

The first three water treatment systems were installed at a pig farm, a mink farm, and a hotel.

When the efficiency of the systems was evaluated after six months, the results were unmistakable: At the hotel, cleaning toilets, wet room tiles, and fixtures had become much easier, leaving everything looking fresh and new for the guests. The pig farmer had not cleaned nozzles for six months, and the mink farmer had no issues with limescale or biofilm in the PEX pipes.

Since its inception in 2014, LAGUR has now installed several thousand systems in Danish single-family homes, apartment buildings, businesses, shopping centers, office buildings, and more

Name and location of production site(s): Attrupvej 4, 8550 Ryomgård, Denmark

Product information

Product name: Lagur® Pro

Environmental Product Declaration (EPD): The product composition was determined on a declared unit (DU) basis. The calculations are based on average annual production.

Product description: LAGUR® is a simple and effective water treatment solution that is easy to install. LAGUR® consists of a half-meter-long pipe that is installed after the main water meter and is connected to a control box.

LAGUR® is inexpensive to operate. Our LAGUR® HOME uses only about 2 kWh per week.

LAGUR® minimizes lime scale problems by changing the structure of the lime, not by breaking it down into smaller parts, because regardless of size, lime particles have a crystalline structure that easily adheres.

LAGUR® converts lime into round granules that minimally adhere to installations and settle as dust on surfaces, where they can be easily removed with a cloth.

LAGUR® first uses electromagnetism to alter the structure of the lime and then ensures that this change is maintained long enough for LAGUR® to provide practical benefits to the consumer.

Thus, LAGUR® affects the physical state of lime, giving it a more rounded character and causing it to lose its ability to deposit on appliances, fixtures, and surfaces like glass and tiles.

Geographical scope: Europe

UN CPC: 482 - Instruments and appliances for measuring checking, testing, navigating and other purposes, except optical instruments; industrial process control equipment; parts and accessories thereof

LCA information

Declared unit: 1 pcs. results are calculated for one complete product.

Reference service life: >10 years


Time representativeness: 2023

Database(s) and LCA software used: SimaPro 9.5.0.2 and Ecoinvent 3.9.1 and Ökobaudat 2023-I

Description of system boundaries:

Cradle to gate with options, modules C1-C4 and module D. A1 (Raw material supply), A2 (Transport) and A3 (Manufacturing) A4 (Transportation), A5 (Construction Installation), B6 Operational energy as well as C1 (Deconstruction), C2 (transport at end-of-life), C3 (Waste processing) and C4 (Disposal) in addition, module D – benefits and loads beyond the system boundary is included.

System diagram:

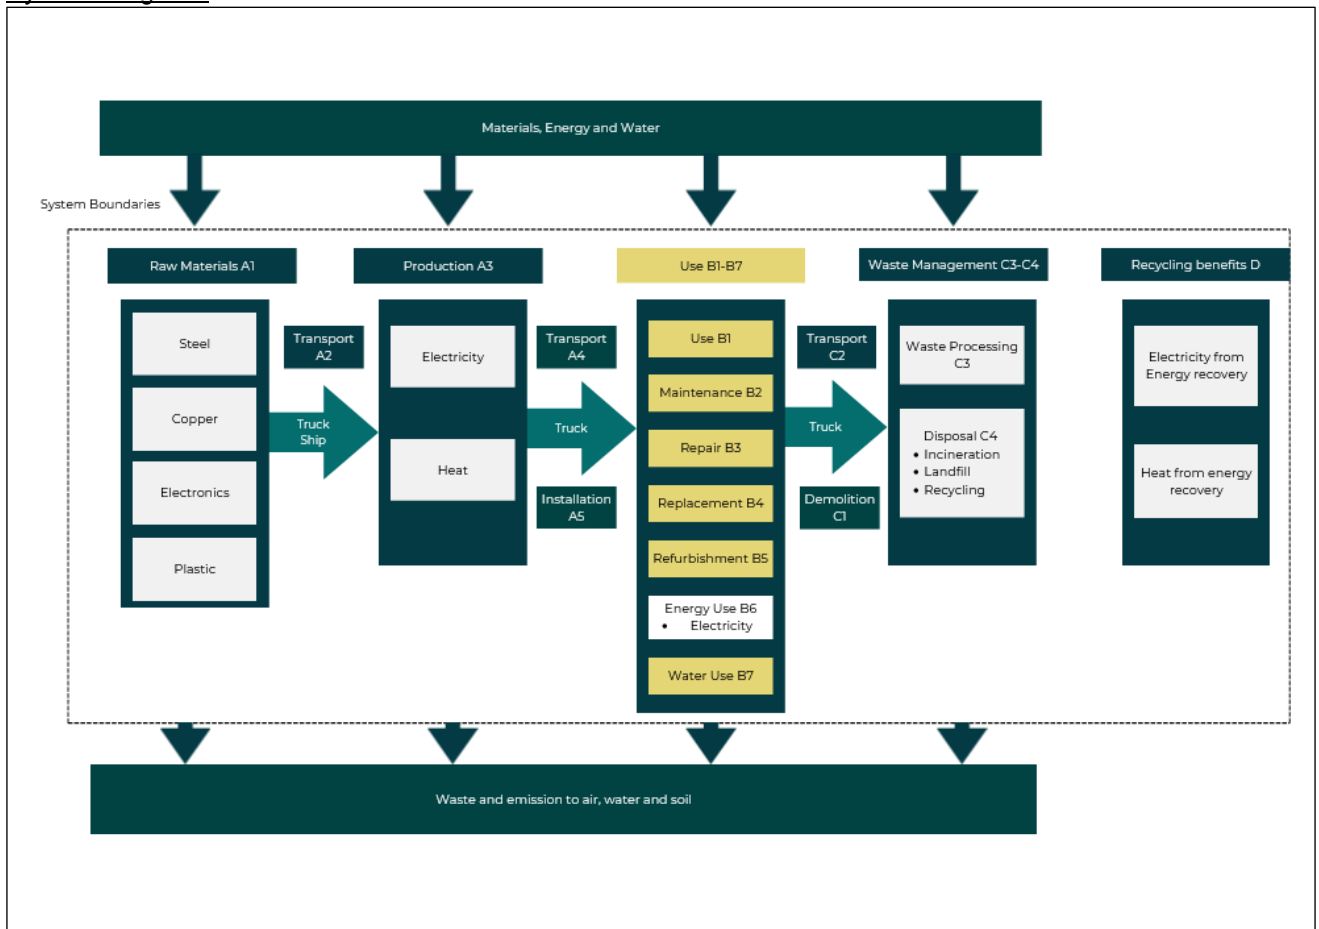

Data quality: The foreground data collected internally is based on yearly production amounts and extrapolations of measurements on specific machines and plants. Overall, the data quality can be described as good. The primary data collection has been done thoroughly.

Cut-off criteria: Life cycle inventory data for a minimum of 99% of total material and energy inputs flows have been included in the life cycle analysis.

Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Product stage			Construction process stage		Use stage							End of life stage			Resource recovery stage	
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing		Disposal
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	MND	MND	MND	MND	MND	x	MND	X	X	X	X	X
Geography	EU	EU	DK	EU	DK	-	-	-	-	-	DK	-	DK	GLO	DK	DK	DK
Specific data used	0,59% - primary			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites	0			-	-	-	-	-	-	-	-	-	-	-	-	-	-
System boundary (X = included in LCA; MND = module not declared)																	

Note: The reported share of primary data is associated with uncertainty, as one or several EPDs that are used as data source lack information on the share of primary data used.

For the use stage only module B6 was chosen since the products does not require any maintenance, repair or replacements. When the products are in operation only electricity is used, so only B6 is relevant.

Product stage:

A1: This module considers the extraction and processing of raw materials and energy consumption.

A2: The raw materials are transported to the manufacturing plant. In this case the model includes road and sea transportation for the raw materials.

A3: This module encompasses the manufacturing process of Lagur® Home, including product fabrication and packaging. It accounts for energy use and waste generation at the production facility. Key steps include:

- **Winding of copper spools**

The electromagnetic signals are generated with spools of copper wire (electromagnets). Copper wire is spun around the inner steel tube of the product.

- **Electronics assembly**

The product includes a control box with electronics which ensures the product' functionality.

A4: Transportation to the customer was estimate that on average is 150km.

A5: Installation of the Lagur® Home

The installation process for Lagur® Home can be completed without the need for power tools, as it primarily involves attaching the parts with screws. Additionally, the foam is thrown out as waste in this phase.

B6: Lagur® home has a constant power draw of 12 watts when installed. This results in an energy consumption of about 2 kWh per week.

End of Life stage:

C1: Dismantling of the product can be done without any power tools, therefore there are no inputs on the C1 phase.

C2: Transport of the discarded product to the processing site. It is estimated that there is no mass loss during the use of the product, therefore, the end-of-life product is assumed that it has the same weight as the declared product. All end-of-life products are being transported to waste treatment and processing which according to the Danish waste management infrastructure on average is assumed to be 20 km distance and the transportation method is lorry which is the most common.

C3: Waste treatment – recycling of the steel and copper materials is assumed to be 95%.

The control box is designed to be disassembled for recycling, facilitating the separation of its components. The printed circuit board (PCB) and cable fall under the category of electrical and electronic equipment (EEE), and their end-of-life treatment follows the requirements outlined in **EN 50693:2019**.

C4: Waste treatment – Inert waste from recycling processes of metal, plastic and electronic components, are assumed to be landfilled.

D: Reuse, recovery and/or recycling potential. The benefits of the recycling of the steel and copper materials as avoiding of producing the new raw materials.

Content information

Product components	Weight, kg	Percentage of the product composition - %	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg
Inner steel pipe	0,503	16,69%	0	0
Outer PVC pipe	0,213	7,07%	0	0
Plastic o-rings	0,096	3,19%	0	0
Copper thread	1,4	46,47%	0	0
Polycarbonate control box	0,467	15,50%	0	0
Electronics	0,368	10,49%	0	0
TOTAL	2,99	100%	0	0
Packaging materials	Weight, kg	Percentage of the packaging composition - %	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg
Foam	0,106	100%	3,52%	0

No dangerous substances from the candidate list of SVHC for Authorisation are present in concentrations greater than 0.1% by weight in the product

Results of the environmental performance indicators

Mandatory impact category indicators according to EN 15804+A2

Results per Declared Unit										
Indicator	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	7,80E+01	2,51E-01	2,11E-01	2,28E+02	0,00E+00	5,01E-02	6,37E-01	4,70E-01	-4,25E+01
GWP-biogenic	kg CO ₂ eq.	3,95E-01	2,21E-04	5,23E-06	1,53E+01	0,00E+00	4,59E-05	3,77E-04	2,95E-04	-2,68E-01
GWP-luluc	kg CO ₂ eq.	1,43E-01	1,47E-04	7,96E-07	7,10E-01	0,00E+00	2,47E-05	5,71E-05	2,64E-05	-7,94E-02
GWP-total	kg CO ₂ eq.	7,85E+01	2,52E-01	2,11E-01	2,44E+02	0,00E+00	5,01E-02	6,38E-01	4,71E-01	-4,29E+01
ODP	kg CFC 11 eq.	3,86E-06	5,46E-09	6,31E-11	5,21E-06	0,00E+00	1,09E-09	1,96E-09	3,72E-09	-2,67E-06
AP	mol H ⁺ eq.	1,29E+00	5,34E-04	2,93E-05	1,15E+00	0,00E+00	1,09E-04	3,89E-04	2,04E-04	-4,14E-01
EP-freshwater	kg P eq.	1,57E-01	2,13E-05	2,98E-07	1,96E-01	0,00E+00	3,56E-06	1,40E-05	8,52E-06	-5,57E-02
EP-marine	kg N eq.	1,33E-01	1,24E-04	1,52E-05	2,27E-01	0,00E+00	2,76E-05	1,66E-04	7,26E-05	-5,95E-02
EP-terrestrial	mol N eq.	1,57E+00	1,26E-03	1,50E-04	2,61E+00	0,00E+00	2,80E-04	1,51E-03	6,97E-04	-6,47E-01
POCP	kg NMVO C eq.	4,38E-01	7,88E-04	3,82E-05	6,33E-01	0,00E+00	1,70E-04	4,63E-04	2,12E-04	-1,86E-01
ADP-minerals&metals*	kg Sb eq.	3,67E-02	1,09E-06	5,60E-09	5,12E-03	0,00E+00	1,64E-07	2,03E-07	1,43E-07	-1,39E-02
ADP-fossil*	MJ	1,02E+03	3,53E+00	2,60E-02	3,75E+03	0,00E+00	7,11E-01	8,89E-01	4,24E-01	-5,41E+02
WDP*	m ³	2,34E+01	1,46E-02	3,47E-04	4,27E+01	0,00E+00	2,93E-03	5,65E-02	2,57E-01	-9,01E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption									

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

Note: it is discouraged to use the results of modules A1-A3 without considering the results of module C when module C is declared.

Disclaimer: The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Additional mandatory and voluntary impact category indicators

Results per Declared Unit										
Indicator	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	7,83E+01	2,51E-01	2,11E-01	2,31E+02	0,00E+00	5,01E-02	6,38E-01	4,71E-01	-4,27E+01

*This method is based on the final government distribution version of the IPCC report 'AR6 Climate Change 2021. This version of the method excludes CO₂ uptake and biogenic CO₂ emissions.

Resource use indicators

Results per Declared Unit										
Indicator	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
PERE	MJ	2,20E+01	1,92E-02	1,84E-04	1,12E+03	0,00E+00	2,75E-03	3,03E-02	2,17E-02	-1,31E+01
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	2,20E+01	1,92E-02	1,84E-04	1,12E+03	0,00E+00	2,75E-03	3,03E-02	2,17E-02	-1,31E+01
PENRE	MJ	9,91E+02	3,53E+00	4,53E+00	3,75E+03	0,00E+00	7,11E-01	1,23E+00	2,39E+01	-5,41E+02
PENRM	MJ	2,76E+01	0,00E+00	-4,50E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-2,31E+01	0,00E+00
PENRT	MJ	1,02E+03	3,53E+00	2,60E-02	3,75E+03	0,00E+00	7,11E-01	1,23E+00	8,89E-01	-5,41E+02
SM	kg	1,04E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,14E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m ³	1,22E+00	5,76E-04	1,90E-05	7,08E+00	0,00E+00	1,02E-04	9,24E-03	4,95E-05	-6,23E-01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water									

¹ This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

Waste indicators

Results per Declared Unit										
Indicator	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
Hazardous waste disposed	kg	5,18E-02	9,01E-05	1,55E-03	4,89E-01	0,00E+00	1,78E-05	1,12E+00	1,11E+00	-2,46E-02
Non-hazardous waste disposed	kg	4,14E-03	1,74E-06	7,78E-09	1,94E-02	0,00E+00	2,34E-07	5,83E-01	5,21E-01	-5,36E+00
Radioactive waste disposed	kg	5,18E-02	9,01E-05	1,55E-03	4,89E-01	0,00E+00	1,78E-05	1,07E-06	8,97E-07	-1,31E-03

Output flow indicators

Results per Declared Unit										
Indicator	Unit	A1-A3	A4	A5	B6	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,16E-01	0,00E+00	-3,16E-01
Material for recycling	kg	2,62E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,86E+00	0,00E+00	-1,94E+00
Materials for energy recovery	kg	1,72E-01	0,00E+00	1,06E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-4,58E-01
Exported energy, electricity	MJ	1,16E+00	0,00E+00	7,13E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-3,06E+00
Exported energy, thermal	MJ	2,08E+00	0,00E+00	1,28E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-5,50E+00

Information on biogenic carbon content

BIOGENIC CARBON CONTENT PER DECLARED UNIT		
Parameter	Unit	At the factory gate
Biogenic carbon content in product	[kg C]	0
Biogenic carbon content in accompanying packaging	[kg C]	0
Note	1 kg biogenic carbon is equivalent to 44/12 kg of CO ₂	

Additional environmental information

Table showing end-of-life scenario

Scenario information	Value	Unit
Assumptions for scenario development	-	As appropriate
Collected separately	2,99	kg
Collected with mixed waste:	-	kg
For reuse	-	kg
For recycling	1,83	kg
For energy recovery	-	kg
For final disposal:	1,16	kg

Manufacturing energy scenario documentation

Energy Source	Method	Kg CO2eq/kWh
Danish electric mix	IPCC 2021	0.211

References

General Programme Instructions of the International EPD® System. Version 4.0.

ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations Principles and procedures.

ISO 14040:2006 Environmental management. Life cycle assessment. Principles and frameworks.

ISO 14044:2006 Environmental management. Life cycle assessment. Requirements and guidelines. EN 15804+A2 Sustainability in construction works – Environmental product declarations – Core rules for the product category of construction products.

EN 50693:2019 Product category rules for life cycle assessments of electronic and electrical products and systems

PCR 2019:14 Construction products (version 1.3.4) date: 2024-04-30

Background REPORT: Lagur® Pro & Home, December 2024

Software: Simapro 9.5.0.2

Databases: Ecoinvent version 3.9.1, ÖKOBAUDAT. (2023)

